

Performance A+ Series

Power Supplies 430W / 530W / 630W / 730W / 830W

The new revision of our successful Performance A series combines high performance with a low noise level and high efficiency. The new DC/DC technology guarantees for increased efficiency and a maximum tension stability even during excessive gaming. Thanks to this high efficiency and the associated 80+ BRONZE certification high electricity costs are now a thing of the past. Six integrated safety circuits provide for an all-time safe operation and the sleeved main cable harness ensures order in the PC case.




Product Features

- extremely silent cooling: large 120mm fan
- excellent air flow design for a better heat dissipation
- full safety design
 - OVP (Over Voltage Protection)
 - UVP (Under Voltage Protection)
 - OCP (Over Current Protection)
 - OTP (Over Temperature Protection)
 - SCP (Short Circuit Protection)
 - OLP (Over Load Protection)
- low stand-by consumption
- high energy efficiency: 80+ BRONZE® certified (complies with ErP2014 norm)
- active-PFC

Technical Data | 430W

	AC INPUT	DC OUTPUT
XP430R8	220V - 240V	+ 3.3V 15.0A
		+ 5.0V 16.0A
		+ 12.0V 35.7A
		- 12.0V 0.3A
		+ 5.0VSB 2.5A
Efficiencies		10% > 79.56%
		20% > 85.82%
		50% > 89.02%
		100% > 86.97%
Noise Level		20% ~ 16 db(A)
		50% ~ 17 db(A)
		100% ~ 23 db(A)

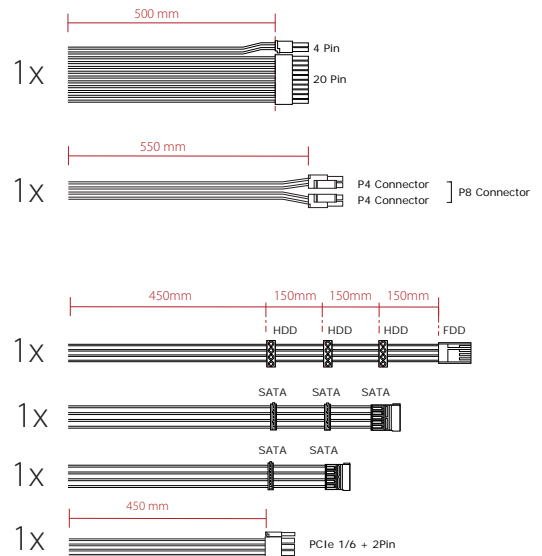


All trademarks and registered marks are the property of their respective companies. Errors excepted. Subject to change without prior notice. Images may differ from original product.

Performance A+ Series


Technical Data | 530W

	AC INPUT	DC OUTPUT
XP530R8	220 - 240V	+ 3.3V 18.0A
		+ 5.0V 16.0A
		+ 12.0V 44.0A
		- 12.0V 0.3A
		+ 5.0VSB 2.5A
Efficiencies		10% > 80.44%
		20% > 86.33%
		50% > 89.14%
		100% > 86.87%
Noise Level		20% ~ 17 db(A)
		50% ~ 18 db(A)
		100% ~ 27 db(A)

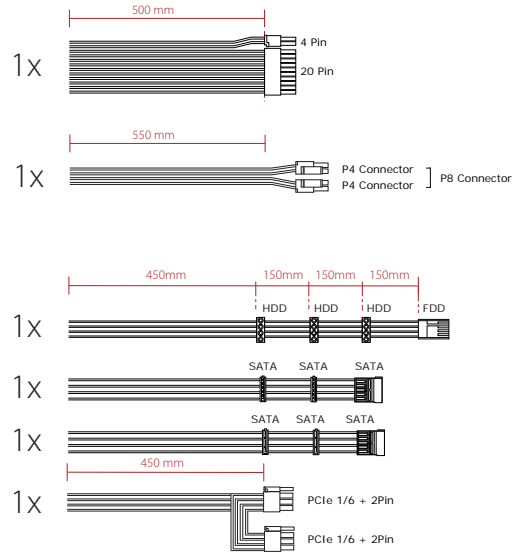

Technical Data | 630W


	AC INPUT	DC OUTPUT
XP630R8	220 - 240V	+ 3.3V 24.0A
		+ 5.0V 20.0A
		+ 12.0V 52.4A
		- 12.0V 0.3A
		+ 5.0VSB 2.5A
Efficiencies		10% > 84.63%
		20% > 89.13%
		50% > 90.68%
		100% > 88.04%
Noise Level		20% ~ 17 db(A)
		50% ~ 18 db(A)
		100% ~ 29 db(A)

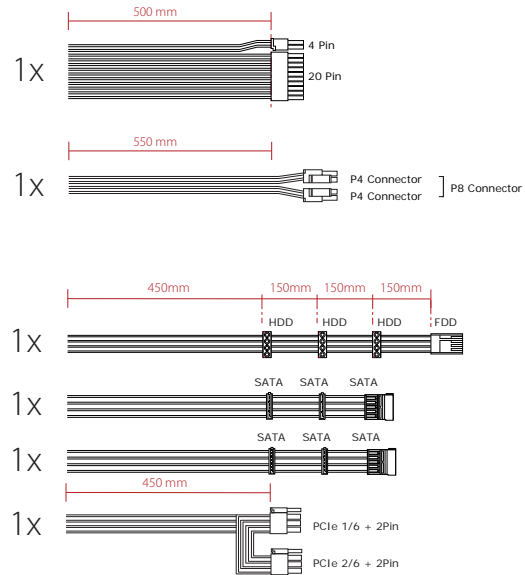

Performance A+ Series


Technical Data | 730W

	AC INPUT	DC OUTPUT
XP730R8	220 - 240V	+ 3.3V 24.0A
		+ 5.0V 20.0A
		+ 12.0V 60.7A
		- 12.0V 0.3A
		+ 5.0VSB 2.5A
Efficiencies		10% > 83.08%
		20% > 88.12%
		50% > 89.91%
		100% > 86.10%
Noise Level		20% ~ 18 db(A)
		50% ~ 19 db(A)
		100% ~ 32 db(A)

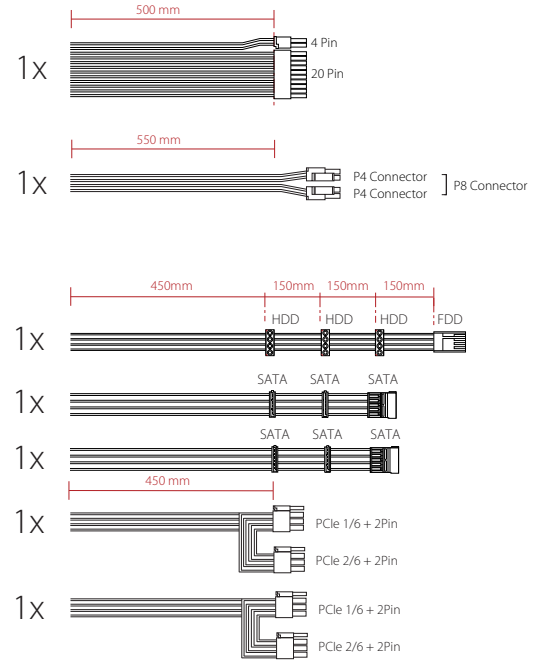

Technical Data | 830W

	AC INPUT	DC OUTPUT
XP830R8	220 - 240V	+ 3.3V 24.0A
		+ 5.0V 20.0A
		+ 12.0V 69.0A
		- 12.0V 0.3A
		+ 5.0VSB 2.5A
Efficiencies		10% > 87.31%
		20% > 90.54%
		50% > 90.57%
		100% > 86.15%
Noise Level		20% ~ 18 db(A)
		50% ~ 20 db(A)
		100% ~ 34 db(A)

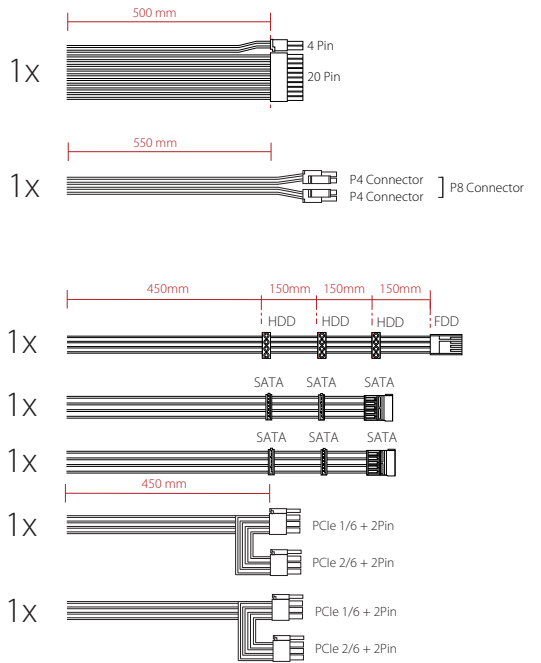

Logistical Data

Manufacturer Number	XP430R8	XP530R8	XP630R8	XP730R8	XP830R8
Item Number	XN060	XN061	XN062	XN063	XN064
EAN Barcode	4044953500428	4044953500435	4044953500442	4044953500459	4044953500466



All trademarks and registered marks are the property of their respective companies. Errors excepted. Subject to change without prior notice. Images may differ from original product.